EXECUTIVE DESIGN SPECIFICATIONS - MANUAL SYSTEM WITH STANDARD SIDE TRACK (V2A)

(External Assembled View)

FOR ILLUSTRATION PURPOSES - NOT DRAWN TO SCALE

Parts Spec

- **A** Housing Assembly: (5-1/2"W x 5-1/2"H)
- **B** #8 x 1" Corrosion Resistant Fastener (Color Matched) 3 Fasteners per End Cap
- **C** PVC Coated Fiberglass Mesh or other - see Mesh Specifications
- **D** Standard Side Track (V2A) c/w Cover (1-3/4" W x 1-17/32" D)
- **E** #8 or #10 Corrosion Resistant Fastener Type and length of screws may vary depending on type of mounting surface
- **F** Slide Bar c/w Probe Assembly
- **G** Bottom Seal - 4" Shown (Other Options Available)

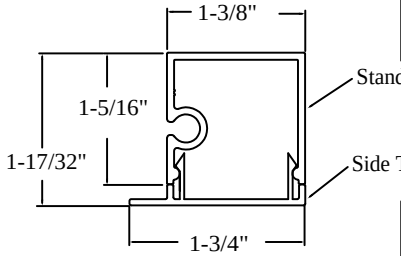

CROSS SECTIONAL VIEW OF THE STANDARD SIDE TRACK (V2A)

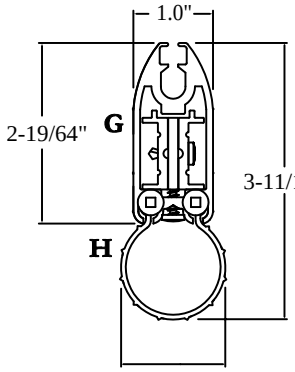

CROSS SECTIONAL VIEW OF THE SLIDE BAR AND 4" BOTTOM SEAL

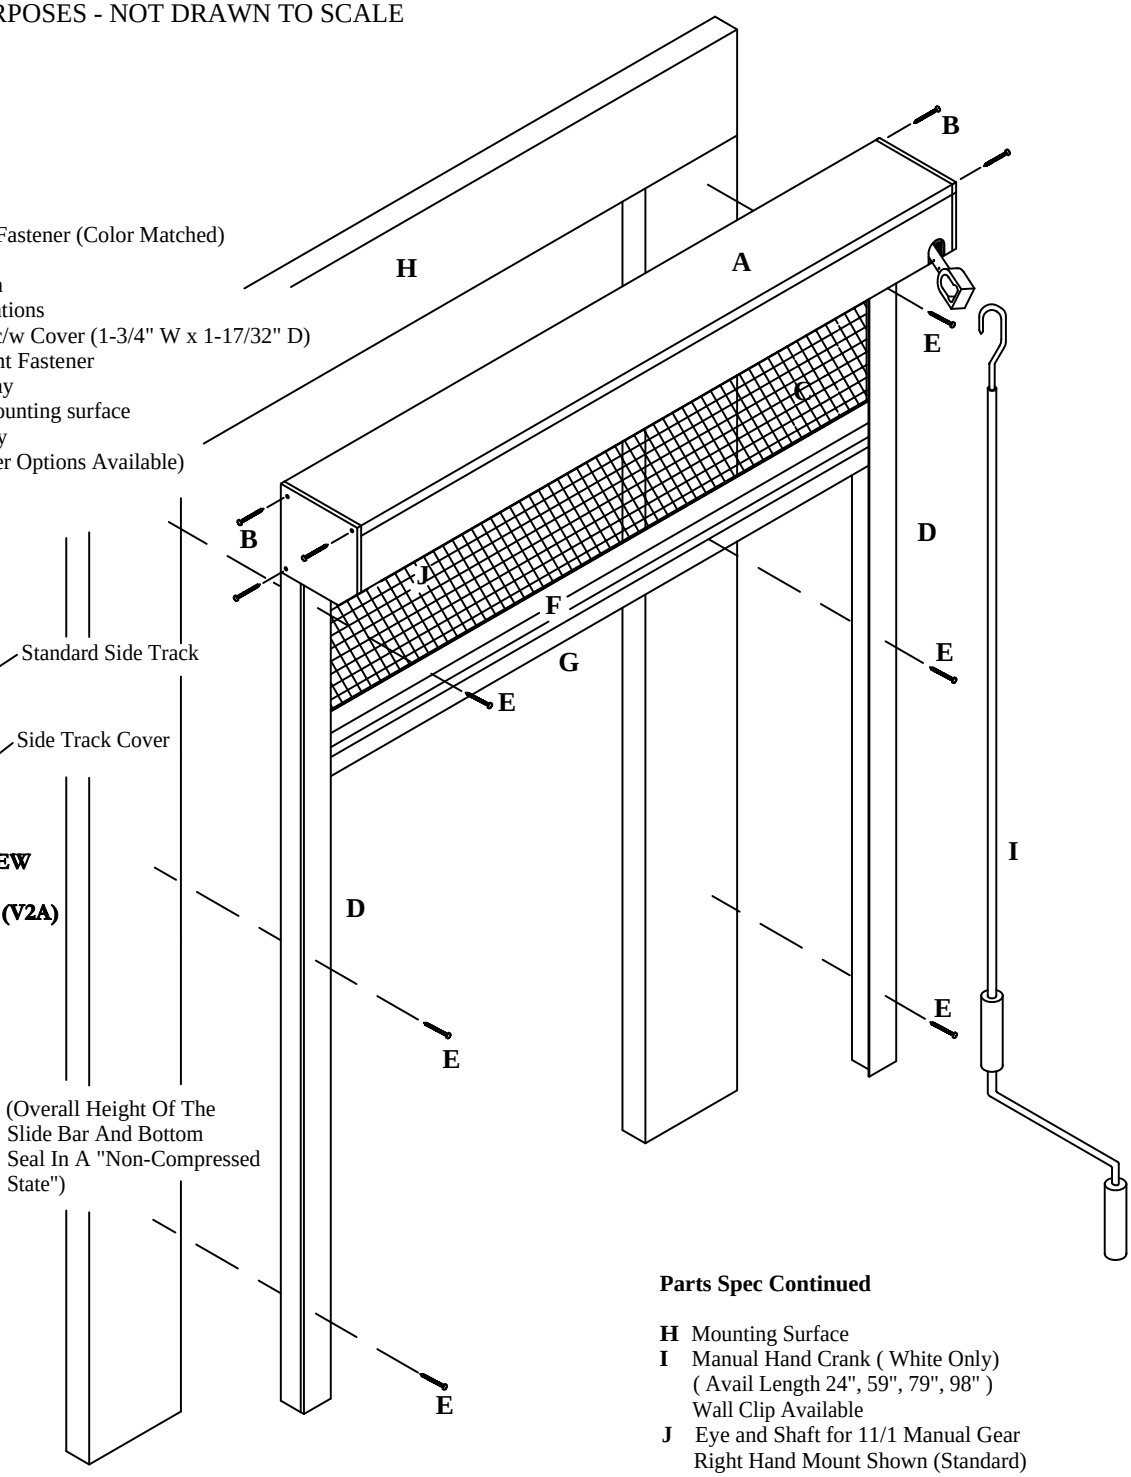

Parts Spec Continued

- **H** Mounting Surface
- **I** Manual Hand Crank (White Only) (Avail Length 24", 59", 79", 98") Wall Clip Available
- **J** Eye and Shaft for 11/1 Manual Gear Right Hand Mount Shown (Standard) Left Hand Mount Option Available

© 2004 Phantom Mfg (Int'l) Ltd. Proprietary Material
Drawing #: PEXECDESIGNSPEC 05(A)
Nov. 26/04 (By N.D.R.)

All components are color matched except Mesh, Bottom Seal, and Manual Hand Crank.
All fasteners are corrosion resistant. See "Fastener Reference Guide" for details.
For application sizes, refer to Size Tables.